


Extension-bar and columns RU-AL... for device-holder RU-GH...

Device-holder for columns RU-AL-S

Type	Order- Nr.	Length	Weight	Loading capacity
RU-AL-S2000	6100000	2000 mm	25 kg	35 kg
RU-AL-S3000	6110000	3000 mm	30 kg	35 kg
RU-AL-S4000	616-100	4000 mm	35 kg	35 kg
RU-AL-S5000	617-100	5000 mm	40 kg	35 kg
RU-AL-S6000	618-100	6000 mm	45 kg	35 kg

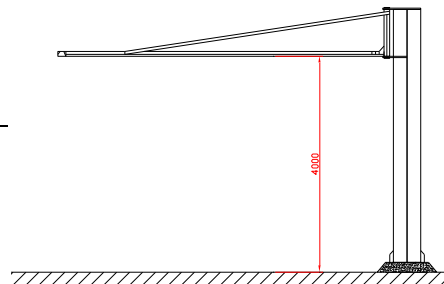

Device-holder for wall-mounting RU-AL-W

Type	Order- Nr.	Length	Weight	Loading capacity
RU-AL-W2000	6120000	2000 mm	25 kg	35 kg
RU-AL-W3000	613000	3000 mm	30 kg	35 kg
RU-AL-W4000	616000	4000 mm	35 kg	35 kg
RU-AL-W5000	617000	5000 mm	50 kg	35 kg
RU-AL-W6000	6180000	6000 mm	60 kg	35 kg



Columns RU-AL-

Type	Order- Nr.	Height lower edge guiding-rail	Total height	Load capacity / extension bar
RU-AL-SL-1	6140000	4000 mm	4700 mm	35 kg
RU-AL-SL-2	6150000	4000 mm	4700 mm	35 kg

Columns for extension bars one or two-sided up to 6000 mm length.

Type	Order- Nr.	Height lower edge guiding-rail	Total height	Load capacity / extension bar
RU-AL-SL-1VA	614-200	4000 mm	4700 mm	35 kg
RU-AL-SL-2VA	615-200	4000 mm	4700 mm	35 kg

Ceiling-rail-units

Name	Order- Nr.	Length	Weight	Capacity		
One-rail ceiling-rail-unit	6010000	4000 mm	25 kg	50 kg		One-rail ceiling-rail-unit
Extension of one-rail ceiling-rail-unit about 1 m	10089000	-	-	-		
Two-rail ceiling-rail-unit with Cross-slide-platform 4000 mm	6020000	3000 mm	65 kg	50 kg		Two rail ceiling-rail-unit with
Additional cross-slide-platform	6030000	4000 mm	15 kg	50 kg		
Ceiling-rails with double-cross-sliding-platform	10227000	3000 mm	65 kg	80 kg		Two-rail ceiling-rail-unit with
Extension of two-rail ceiling-rail-unit About 1 m	10011000	-	-	-		cross-sliding-platform and double-

Device-holder RU-GH-....

Equipment and Accessory:

- Alternatively with 4 compressed-air- or 4 electric-connectors, or with 4 Compressed air and electric connectors.
- With tool-shelf 700 x 240 mm.
- Holders for Screwdriver, Drilling-machine, Silicon-injection etc.
- Charge Carrier with air and electricity



RU-GH-4 DEW with additional shelf
Extendable from 1700 mm to 2800 mm.



RU-GH-4DEW, 4 compressed-air- and
4 electric-connectors. Holder for hand-held-units

Technical data:

Type	Order- Nr.	Compressed air connectors	Electric connectors	Weight	Capacity
RU-GH-4 DEW	5900000	4	4	25 kg	10 kg
RU-GH-4 E	5910000	-	4	24 kg	10 kg
RU-GH-4 D	5920000	4	-	24 kg	10 kg
RU-GH2-4DEW	10068000	4	5	45 kg	30 kg
Pneumatically stopper	5163				-
Extension of supply-line	5159				-
Additional-shelf 700 X 500 mm at RU-GH2-4DEW included	5914				-