


Roll Lifting Cart

RU-HRW4

Developed to reduce the time and cost expenses for packaging windows

The roll lifting cart will be positioned behind the glazing station so that the rolls of the glazing station and the rolls of the roll lifting cart are at the same height. To prevent the elements from tilting we've developed a comb swivel-mounted fixture. The operator rolls the elements in and adjusts the comb to the thickness of the elements. Then he drives to the next loading position. This activity will be repeated until the roll lifting cart is full. Through apply of cross boards the elements get assured and lowered on wood bars. The wood bars also get screwed to the boards which hold the elements together. The roll lifting cart can be moved out and is ready for a new loading.

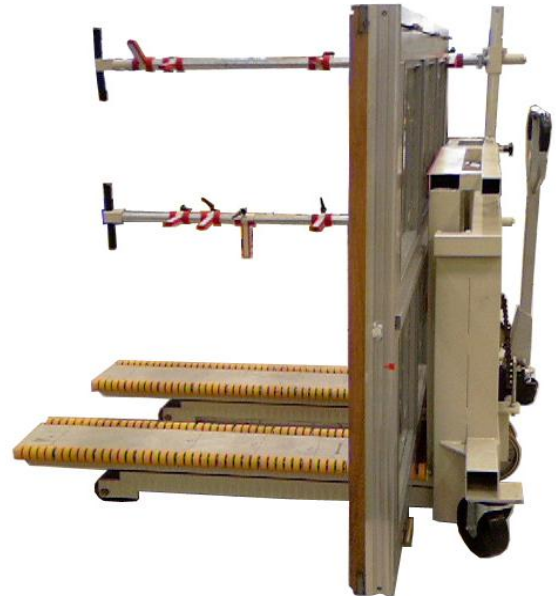

Technical Data:

Type	Order-No.	Fork length	Dimensions L x T x H
RU-HRW4	10674000	1200 mm	1400 x 1665 x 1510 mm