

Glazing- and controlling-press

RU-VGP


The glazing press is made for the glazing, sealing, assembly of the wood aluminium sash or door and the final check.

Equipment and accessory:

- One of the press-bars (left or right) is fix mounted, the second press-bar is moveable by hand. The Press-bar is on top and bottom above a guided by a tooth rack, thereby the moving of the press-bar is absolutely parallel during the pressing procedure.
- Simultaneous tilting and moving of the press bars. Therefore opening and closing of the press is very quickly and economical.
- Press bar, above and below, guided by a rail, the moving of the press bars is absolutely parallel during the pressing procedure.
- Pneumatic controlled lifting device, from 300 – 800 mm.
- Contact-surface available with felt, PVC or ledges rubber-rolls-ledges roll Ø 48mm, rolls axe distance 50mm or 25mm.
- Rolls-conveyor on the bottom with steel-rolls, length 200 mm
- 2 tilt able stops for the adjustment of the hinges, sealing of the inside and the end control.
- Tray for tools and accessories to hook into the roller conveyor on the bottom.
- Tilting device available, to tilt the contact surface from 83° to 90° for the assembly of doors and sashes



RU-VGP Frame press

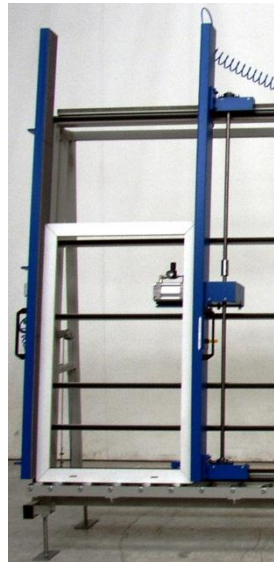

Technical Data:

Type	order- nr.	Length	maximum clamping width	width	Surface height	total height	Press arm height	weight
RU-VGP 3*	1170000	3400 mm	3000 mm	900 mm	1900 mm	2500 mm	2200 mm	340 kg
RU-VGP 4*	1180000	4400 mm	4000 mm	900 mm	1900 mm	2500 mm	2200 mm	370 kg

* When you order please tell us which side should be able to be tilted